

EPINUS

WITH Awax safety module



CODED SAFETY SWITCH WITH INTEGRATED MAGNETIC LATCH

- Magnetic latch 2 or 4 Kg
- Decoding by Acotom®2 process
- Auxiliary output for PLC or lights
- Stainless steel housing 316L
- Laser marking
- Protection class IP69K
- Temperature -20°C to +60°C (EPINUS 4K)
- Temperature -20°C to +90°C (EPINUS 2K)


SAFETY CATEGORY

- EPINUS : EN60947-5-1/2/3
- 1 EPINUS with Awax : category 4
- EPINUS in series with Awax : category 3

WIRING DIAGRAM

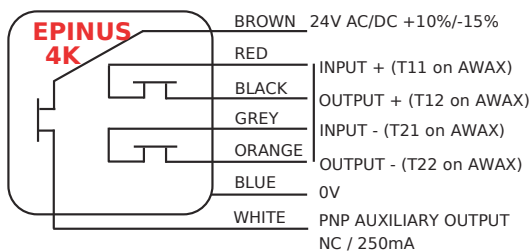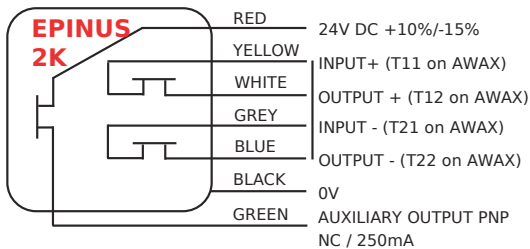

DIMENSIONS (VERSION 2K)

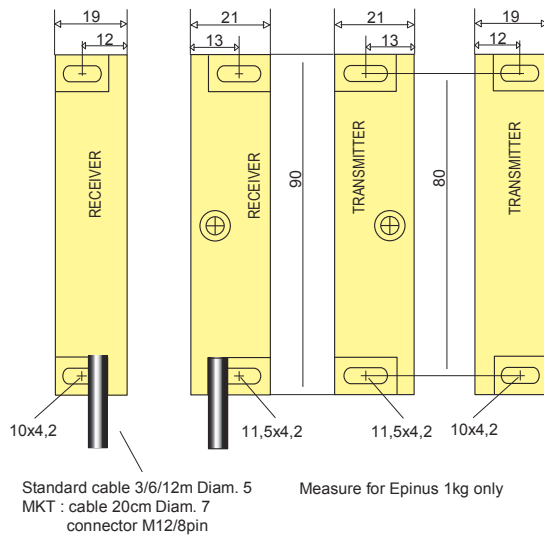

EPINUS 4K : see dimensions p.34

APPLICATION

Designed to keep doors or moving protectors magnetically closed even while vibrating. Thanks to solid state contacts, the life expectancy is improved.